
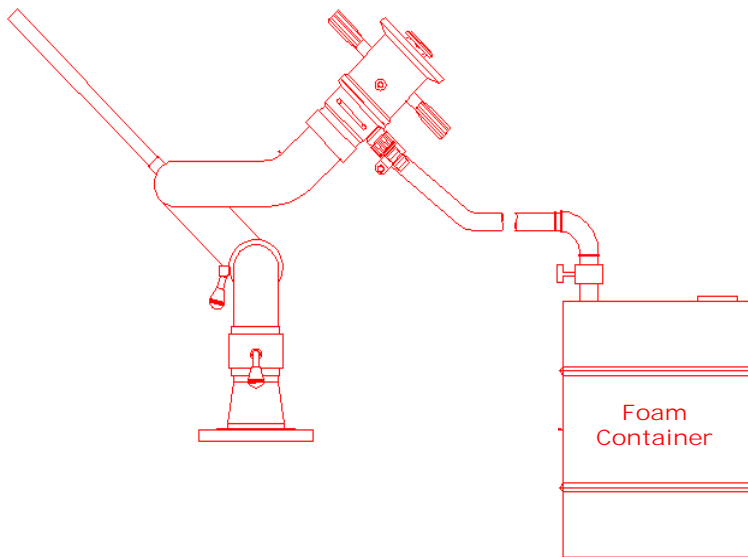


## UL LISTED FIRE FOAM MONITOR


## MODEL GGT SNR 500

### 1. GENERAL DESCRIPTION

The manually operated Self Inducting non-aspirating Foam Monitor fully made of Stainless steel, capable of discharging 500 US GPM (1893 LPM) at 100 psi (7 bar) inlet pressure over a range of 50 meters in horizontal direction. Foam proportioning 3 % is done with help of Foam Inductor placed within the Nozzle. The Foam Monitor has facility for converting Water/Foam jet to fog and vice-versa very quickly and easily, even during continuous operation. Foam Monitor is provided with lock and pin type bearing for easy movement in horizontal and vertical direction. A single fire fighter can manually operate the Foam Monitor with large flow & long-range capability. The monitor assembly is designed to withstand the nozzle reaction force experienced during the operation of jet / fog.

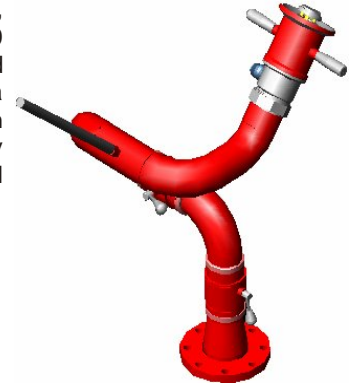

### Jet & Fog Adjustment

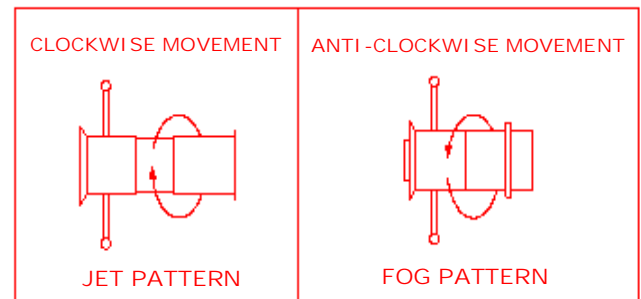

### 2. SALIENT FEATURES

- ✚ Certified and Approved by **(UL) Underwriters Laboratory USA.**
- ✚ Discharge Capacity of 500 US GPM (1893 LPM) at 100 Psi (7 bar) Nozzle inlet pressure.
- ✚ Excellent Horizontal throw of 50 meters and above.
- ✚ Excellent Full Fog and Semi Fog Coverage.
- ✚ Low Expansion, Hence less loss of foam and more cooling effect on hot surface.
- ✚ Quick change over from jet to fog even during high operating pressure.
- ✚ Easy maneuverability in horizontal and vertical plane.
- ✚ Fully Stainless Steel Construction.
- ✚ Almost maintenance free.
- ✚ Available in Fixed and Mobile Version.
- ✚ Various Metallurgy Options.

### 3. APPLICATION

The Monitor is highly effective with water and foam for fast knockdown of Fires at Oil & Gas Plants, Off-Shore & On Shore Platforms, Oil Refineries, Petroleum Storage Tanks & Depots, Chemical & Fertilizer Plants, Steel Plants, Power Plants, Ammunition Depots, Defense Stores, Naval Ships, Ships & Oil tanker Ports & Jetties Etc.


**UL LISTED FIRE FOAM MONITOR**

**MODEL GGT SNR 500**

**4. TECHNICAL SPECIFICATION**

⚡	Flow at 100 psi (7 bar) pressure	:	500 US GPM (1893 LPM)
⚡	Nozzle	:	Non-aspirating type
⚡	Induction Type	:	SELF Type
⚡	Induction Rate	:	3 % (As Per UL Guidelines)
⚡	Foam Pick Up Tube	:	PVC 3 meter with fittings.
⚡	Monitor Elevation	:	+90 <sup>0</sup> & - 30 <sup>0</sup> Vertical
⚡	Rotation	:	360 <sup>0</sup> Horizontal.
⚡	Water way size	:	75 NB
⚡	Inlet Flange Size	:	4" NB 150# S.O.R.F Flange
⚡	Hydrostatic Test Pressure (Monitor)	:	21 bar.
⚡	Finish/ Paint	:	Fire red shade of Epoxy / Powder Coating.

**5. MATERIAL OF CONSTRUCTION FOR MONITOR AND NOZZLE.**

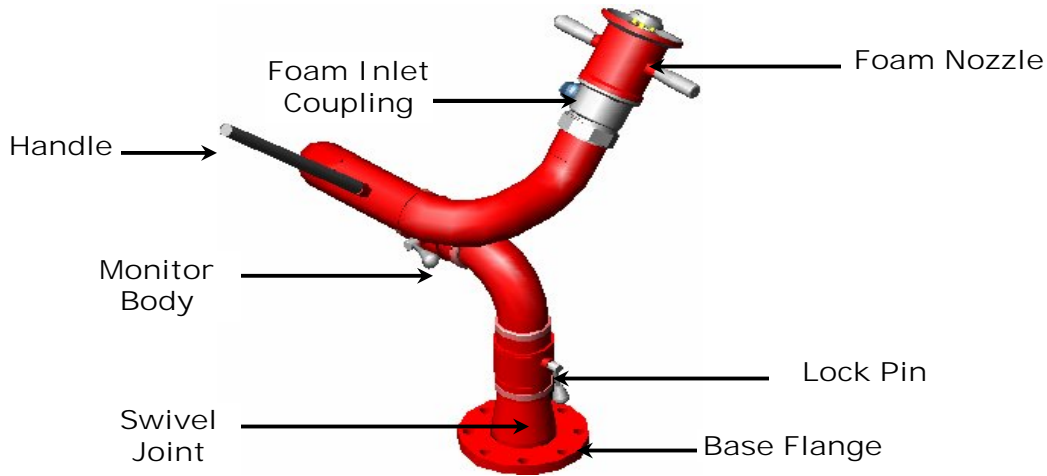

⚡	Base Flange	:	SS 304
⚡	Monitor Body	:	SS 304
⚡	Swivel Joints	:	SS 304 / Gun Metal / Bronze
⚡	Lock Pin	:	SS 304
⚡	Handle	:	SS 304
⚡	Foam Nozzle	:	SS 304 / Gun Metal / Aluminum / Bronze

**MONITOR ALSO AVAILABLE IN METALLURGY OF SS 316 FOR SPECIAL APPLICATION.**

**6. PERFORMANCE OF MONITOR AT 100 PSI (IN STILL AIR CONDITION)**

a)	Water jet at 30° from Horizontal plane	:	50 mtrs.
b)	Foam jet at 30° from Horizontal plane	:	48 mtrs.
c)	Fog jet at 30° from Horizontal plane	:	15 mtrs.

**7. APPROVAL: UL LISTED WITH FOLLOWING FEATURES**

a)	Nozzle	:	Non Air Aspirating Nozzle.
b)	Monitor Solution Flow	:	500 GPM.
c)	Operating Pressure	:	100 PSI.
d)	Induction	:	By Nozzle having Self Induction.